




# ARCHITECTURAL SERIES

NEW RED SMOOTH & VELOUR FLASHED

Ideal for a multitude of building projects, Architectural Series' through-the-body colors and smooth or velour texture are a perfect choice for design versatility. Available in sizes ranging from Modular to Metric Jumbo and Utility, the Architectural Series is a product that scales easily to suit the project at hand, and can be paired well with other brick and stone products such as Vivace, Artiste, Finesse or Profile.

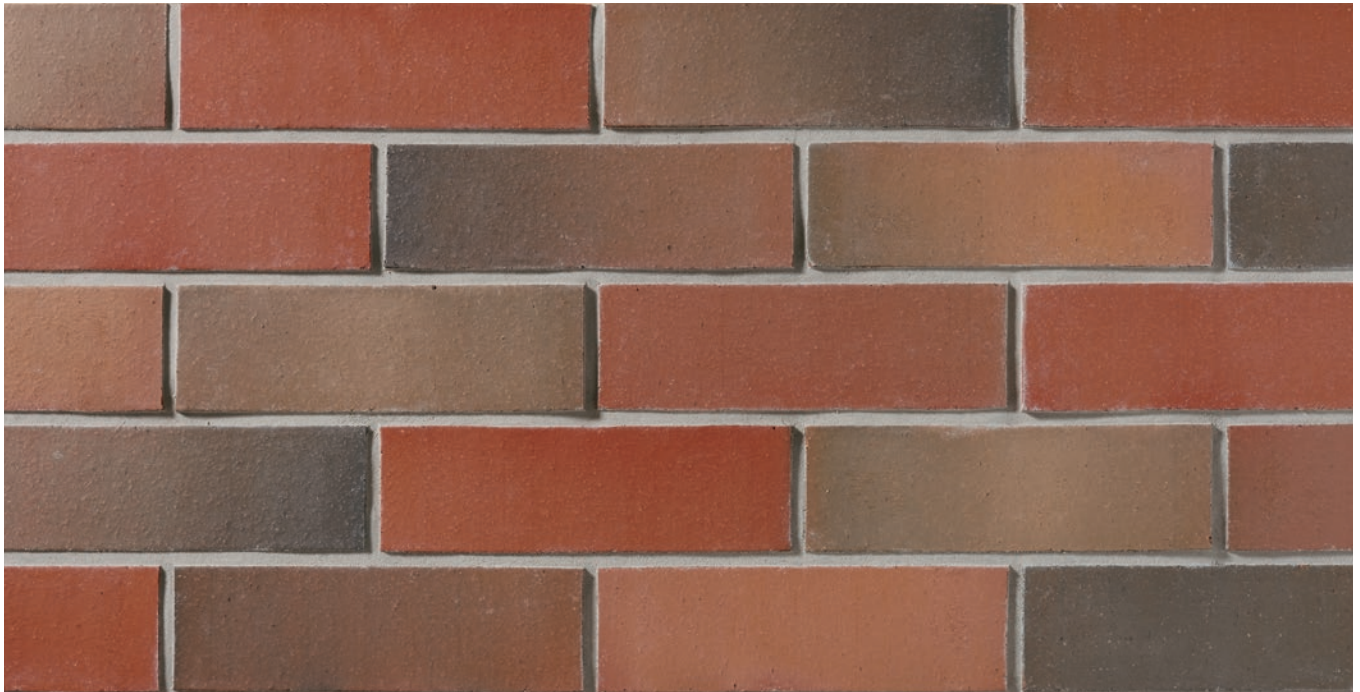

**NEW! RED SMOOTH FLASHED**

**AVAILABLE SIZES:**  
Metric Modular, Modular, Premier Plus, Metric Norman, Metric Jumbo, Closure, Utility



**NEW! RED VELOUR FLASHED**

**AVAILABLE SIZES:**  
Metric Modular, Modular, Premier Plus, Metric Norman, Metric Jumbo, Closure, Utility

# ARCHITECTURAL SERIES

## SIZES



**Metric Modular**  
 Length 190 mm (7 1/2")  
 Height 57 mm (2 1/4")  
 Depth 90 mm (3 1/2")  
 Bricks per square foot 7  
 Bricks per square meter 75



**Modular**  
 Length 194 mm (7 5/8")  
 Height 57 mm (2 1/4")  
 Depth 92 mm (3 5/8")  
 Bricks per square foot 6.8  
 Bricks per square meter 73.5



**Premier Plus**  
 Length 257 mm (10 1/8")  
 Height 79 mm (3 1/8")  
 Depth 90 mm (3 1/2")  
 Bricks per square foot 3.9  
 Bricks per square meter 42



**Metric Norman**  
 Length 290 mm (11 1/2")  
 Height 57 mm (2 1/4")  
 Depth 90 mm (3 1/2")  
 Bricks per square foot 4.6  
 Bricks per square meter 49.8



**Metric Jumbo**  
 Length 290 mm (11 1/2")  
 Height 90 mm (3 1/2")  
 Depth 90 mm (3 1/2")  
 Bricks per square foot 3  
 Bricks per square meter 33



**Closure**  
 Length 194 mm (7 5/8")  
 Height 92 mm (3 5/8")  
 Depth 92 mm (3 5/8")  
 Bricks per square foot 4.5  
 Bricks per square meter 48.4



**Utility**  
 Length 295 mm (11 5/8")  
 Height 92 mm (3 5/8")  
 Depth 92 mm (3 5/8")  
 Bricks per square foot 3  
 Bricks per square meter 32.3

## COLORS



## SPECIFICATIONS

Manufactured in our Farmersburg, Indiana Plant

| Product Property   | CSA      | ASTM       | Typical Brampton Brick Range*    |
|--|----------|------------|----------------------------------|
| Compressive Strength (min)   | > 21 MPa | > 3000 psi | 40 – 60 MPa or 5800 – 8700 psi   |
| 24 hour cold water absorption  |          |            | 3% - 6%                          |
| 5 hour boil water absorption   | < 17%    | < 17%      | 4% - 8%                          |
| C/B Ratio  | < 0.78   | < 0.78     | 0.65 - 0.75                      |
| Based on CSA A82 for Exterior Grade (EG) brick, Type X and ASTM C216 for Severe Weather (SW) Brick, Type FBX |          |            | *not applicable if 24 hr CWA <8% |

Minimum orders apply. Check with a Brampton Brick Sales Representative on product availability prior to specifying. For additional information, please visit our website at [BramptonBrick.com](http://BramptonBrick.com)

To find a dealer nearest you please visit:

**BramptonBrick.com**

Or, call us toll free at:

**1.800.GO.BRICK (462-7425) (Canada)**

**1.844.GO.BRICK (462-7425) (USA)**

Product representations shown in this publication are intended to convey the general color, texture and appearance of the product. Variations may occur in the manufacturing and printing process. Always select from an actual product sample.