



PLACE ADDITIONAL REINFORCEMENT ON THE NEXT COURSE OF SEGMENTAL UNIT IMMEDIATELY ABOVE THE SPECIFIED PLACEMENT ELEVATION IN A MANNER THAT ELIMINATES GAPS LEFT BY THE PREVIOUS LAYER OF REINFORCEMENT AT THE SPECIFIED REINFORCEMENT ELEVATION.

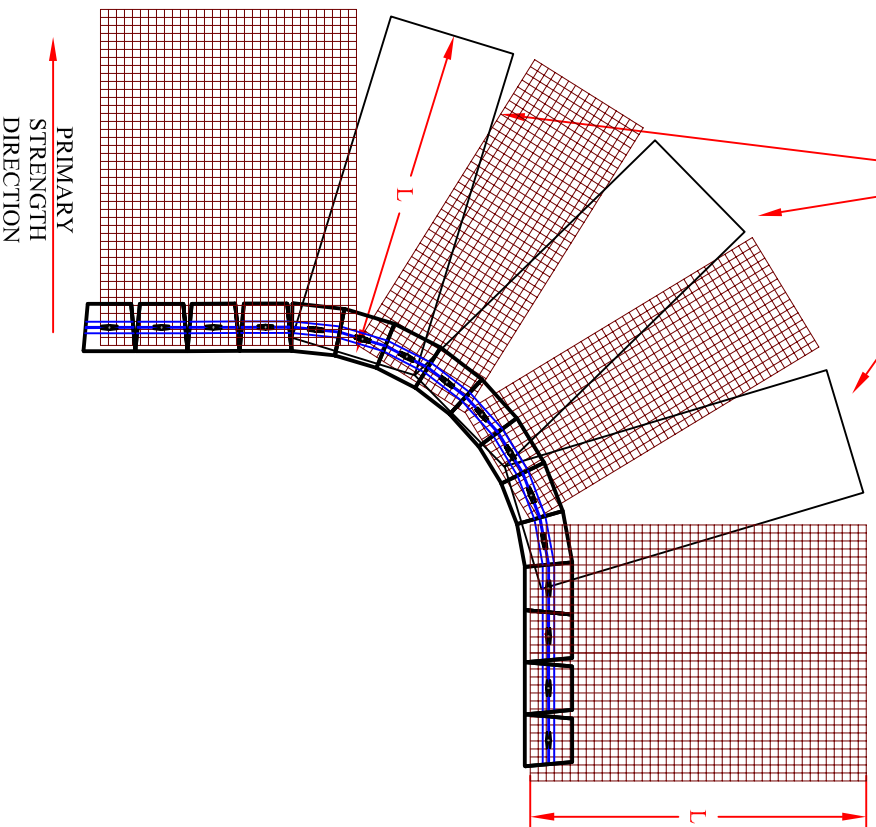

NOTES:
THE TIGHTEST RADIUS FOR AN INSIDE CURVE OCCURS AT THE BOTTOM COURSE - THIS MUST BE GREATER THAN THE MINIMUM INSIDE RADIUS OF 1512mm [59.51'] TO THE FACE OF THE BLOCK. INCREASE THE WALL RADIUS BY 20mm [0.8"] FOR EACH ADDITIONAL COURSE THAT IS SETBACK.

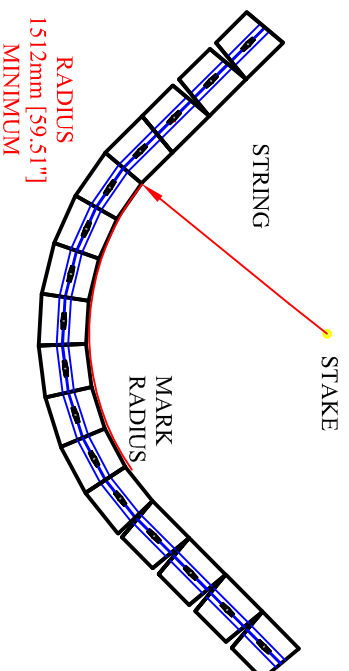

Nueva 75 Wall System Inside Curve Details

This graphic represents a preliminary, non site-specific design. If used for construction, a registered professional engineer must be retained to review & approve the design, confirm site conditions, and inspect construction.

