



PLACE ADDITIONAL REINFORCEMENT ON THE NEXT COURSE OF SEGMENTAL UNIT IMMEDIATELY ABOVE THE SPECIFIED PLACEMENT ELEVATION IN A MANNER THAT ELIMINATES GAPS LEFT BY THE PREVIOUS LAYER OF REINFORCEMENT AT THE SPECIFIED REINFORCEMENT ELEVATION.

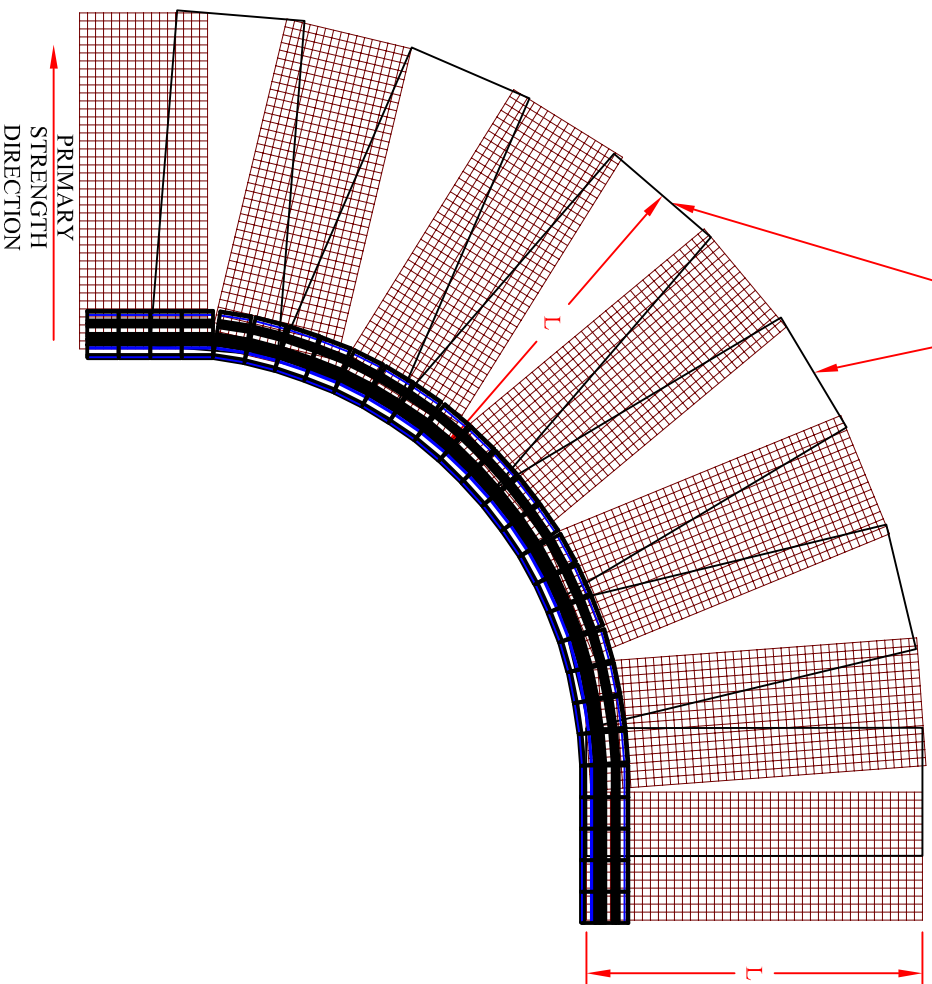

NOTES:  
THE TIGHTEST RADIUS FOR AN INSIDE CURVE OCCURS AT THE BOTTOM COURSE - THIS MUST BE GREATER THAN THE MINIMUM INSIDE RADIUS OF 1.2m [4'-0"] TO THE FACE OF THE BLOCK. INCREASE THE WALL RADIUS BY 25mm [1"] FOR EACH ADDITIONAL COURSE

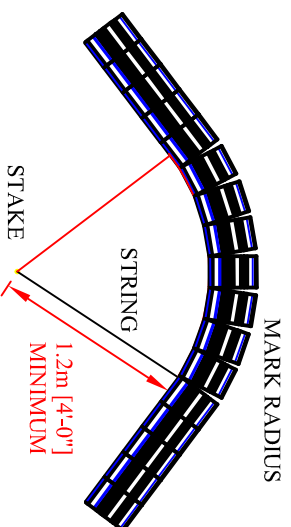

This graphic represents a preliminary, non site-specific design. If used for construction, a registered professional engineer must be retained to review & approve the design, confirm site conditions, and inspect construction.

Ortana Retaining Wall System  
Inside Curve Details

