


NOTES:
THE TIGHTEST RADIUS FOR AN OUTSIDE CURVE OCCURS AT THE TOP COURSE - THIS MUST BE GREATER THAN THE MINIMUM RADIUS OF 1.2m [4'-0"] TO THE FACE OF THE BLOCK. INCREASE THE WALL RADIUS BY 25mm [1"] FOR EACH ADDITIONAL COURSE.



MARK RADIUS

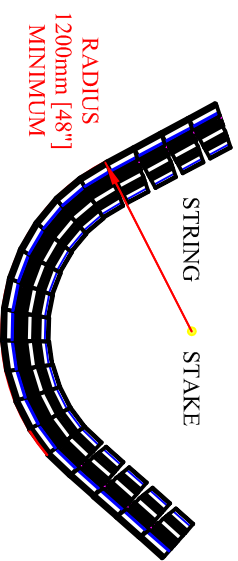

This graphic represents a preliminary, non site-specific design. If used for construction, a registered professional engineer must be retained to review & approve the design, confirm site conditions, and inspect construction.

Ortana Retaining Wall System
Outside Curve Details