


Proterra™ Smooth


Nueva® Collection



GREYFIELD, SMOOTH



NATURAL, SMOOTH



**Smooth
Coping and Wall**
(Coping centres over wall)

Wall: Proterra™ Smooth, Natural



Standard Unit
39.37 x 7.28 x 14.76"
(1000 x 185 x 375mm)

Smooth on both faces
Individually Packaged



Double Unit
39.37 x 7.28 x 29.52"
(1000 x 185 x 750mm)

Smooth on one face,
Split on one face
**Packaged with
Standard Unit**



Triple Unit
39.37 x 7.28 x 44.29"
(1000 x 185 x 1125mm)

Smooth on both faces
Individually Packaged



Standard Corner Unit
39.37 x 7.28 x 14.76"
(1000 x 185 x 375mm)

Smooth on both faces
and closed end
Individually Packaged



Coping Corner/End Unit
39.37 x 7.28 x 16.92"
(1000 x 185 x 430mm)

Smooth on both faces
and closed end
Individually Packaged



Coping-Step Unit
39.37 x 7.28 x 16.92"
(1000 x 185 x 430mm)

Smooth on both faces
Individually Packaged

Note: Coloured wall units also available as custom order. Minimum quantities apply.

Packaging Specs

PROTERRA™ SMOOTH	Area/bundle (face ft.)	Per Full Bundle			Per Layer				Per Section			
		Lin. Ft.	Pieces	Wt. (lbs)	Layers	Sq. Ft.	Pieces	Wt. (lbs)	Sections	Sq. Ft.	Pieces	Wt. (lbs)
Standard Unit	18	29.5	9	3150	3	6	3	1050	-	-	-	-
COMBO BUNDLE Standard, Double	6	9.8	3 each	3150	3	2	1 each	1050	-	-	-	-
Triple Unit	6	9.8	3	3150	3	2	1	1050	-	-	-	-
Standard Corner Unit	24.6	40.6	9	3150	3	8.2	3	1050	-	-	-	-
Coping Corner/ End Unit	17.1	28.1	6	2400	3	5.7	2	800	-	-	-	-
Coping-Step Unit	12	19.6	6	2388	3	4	2	796	-	-	-	-

Weights/Piece are approximate.

FEATURES & RECOMMENDED USES

Product Matrix

RECOMMENDED USES								FUNCTIONAL FEATURES		
PRODUCT	SIZES	GARDEN WALL	RETAINING WALL	CURB	PILLAR	TREE RING	FEATURE*	DOUBLE- SIDED	BUILT-IN INTERLOCK	CORED
Proterra™ Smooth	Standard Unit		√					√	√	
	Double Unit		√						√	
	Triple Unit		√						√	

*Feature = Fire pit/fire table, water feature, outdoor kitchen

WALL TYPE/ALIGNMENT & INSTALLATION									
PRODUCT	SIZES	STRAIGHT WALL	CURVED WALL	FREE- STANDING	SINGLE- DEPTH GRAVITY	MULTI- DEPTH GRAVITY	STABILIZED BACKFILL	GEOGRID REINFORCED	MACHINE INSTALL
Proterra™ Smooth	Standard Unit	√		√	√	√	√	√	√
	Double Unit	√		√	√	√	√	√	√
	Triple Unit	√		√	√	√	√	√	√

All Oaks Landscape products fully meet or exceed the latest version of CSA A231, ASTM C936, ASTM C1372 or ASTM C1782 as applicable to the specific product and area of sale.

Proterra™ Corners


TECH NOTE - SEGMENTAL RETAINING WALL CORNERS

There are two questions that commonly come up specific to SRW corners, namely:

1. WHAT IS A LEFT AND RIGHT CORNER?

The easiest way to remember a left versus a right corner is to look at the unit along its long length with your hands in an L-Shape, fingers down.

The middle unit in the layer can be used as a left or right corner.

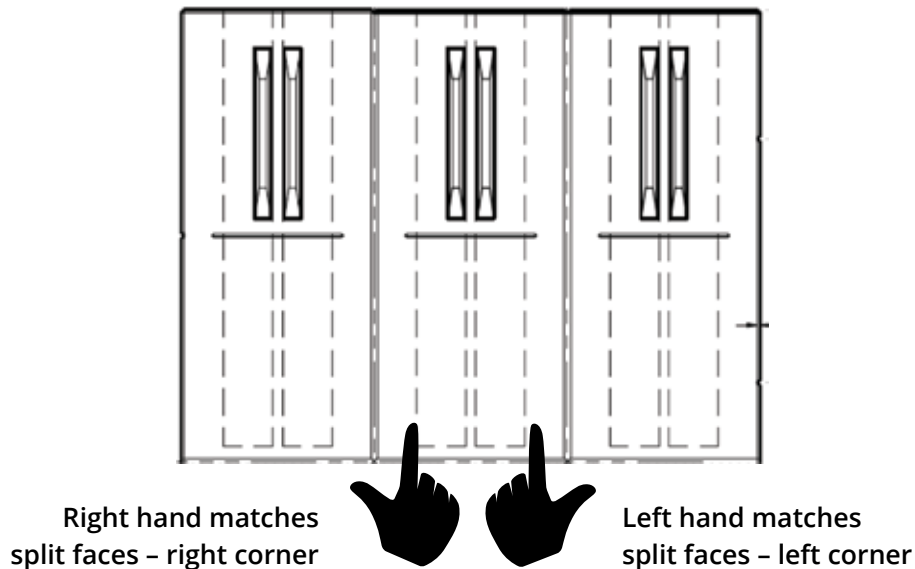

2. WHAT IS THE AREA OF A CORNER?

Remember that when installed in a wall, two sides of a corner are visible (the front and one side face). So the area of coverage of a corner is the sum of the two visible faces.

Using a Proterra™ corner as an example, the two exposed faces measure 1m x 0.185 m and 0.375 m x 0.185 m – the total area of the corner is therefore $0.185 + 0.069 = 0.254$ square metres.



OAKSPAVERS.COM

CA 1.800.709.OAKS (6257) | US 1.800.876.OAKS (6257)

Product representations shown in this publication are intended to convey the general colour, texture and appearance of the product. Variations may occur in the manufacturing and printing process. Always select from current, physical product samples.